


OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER
SECTION 34 TOWNSHIP 15 RANGE 4
DATE: 5-9-98 7-20-03
PARTY CHIEF: Wilcoxon
CREW: _____
TYPE OF MARKER: Harrison
METHOD OF ESTABLISHMENT: County: 7-25-96

IN. S.P.C. E ZONE, NAD 83
NAME: 15043407
N: 493690.3250(m)
E: 64340.6700(m)

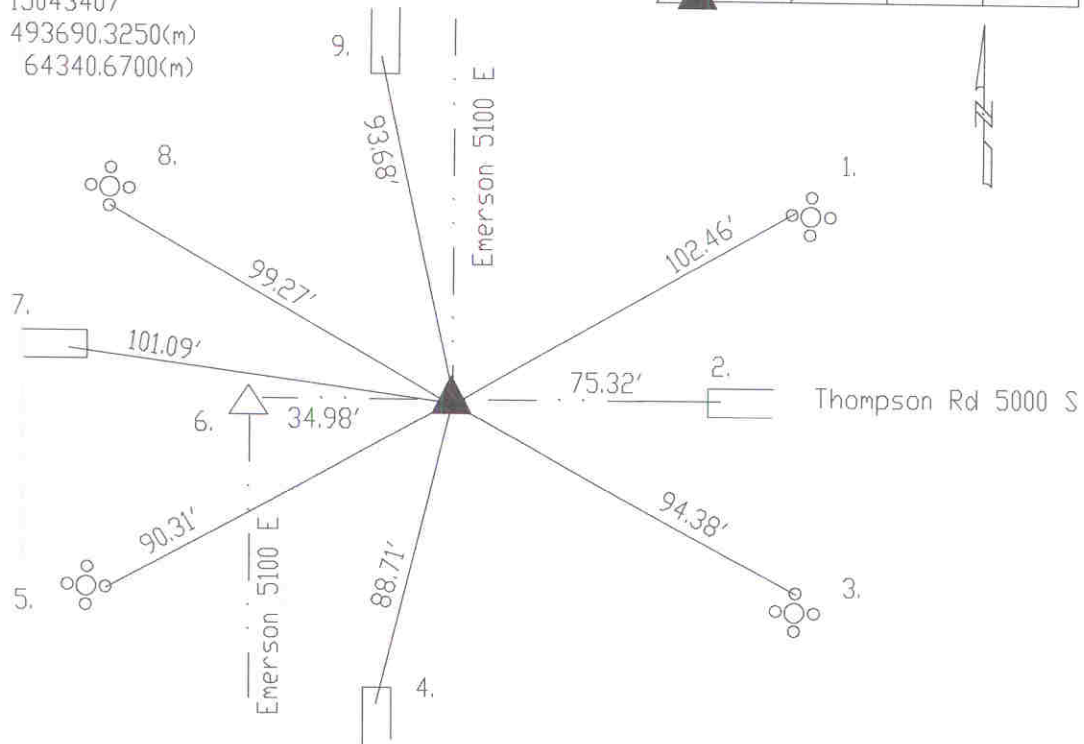

Original post set 1820 by Hendricks with witnesses: 14" white oak S 85 E 28 links, 20" buckeye N 85 W 40 links per Marion County Atlas pg. 10. Hosbrook 3-1851 called no stone but witnesses: 22" oak S 83 E 33 links, 14" beech S 10 E 30 links per Franklin Township Legal Survey Book pg. 4. Fatout 6-4-1883 called stone no witnesses per Franklin Township Legal Survey Book pg. 60. MCS at an unknown date in 1950's called iron pin. Rednour 12-28-71 called railroad spike. Fortner 6-25-75 called same. Wilcoxon 4-12-82 called brass plug in steel box. Gries 12-7-88 called same. Excavated by Whiteside 5-11-98 and Harrison set : replacing brass plug in steel box.

HC543407

REF.	DISTANCE	DESCRIPTION
1.	102.46'	Cut 'x' W-bolt signal base
2.	75.32'	Due E to 'x' in W-end median
3.	94.38'	Cut 'x' N-bolt signal base
4.	88.71'	Cut 'x' N-end median
5.	90.31'	Cut 'x' E-bolt signal base
6.	34.98'	Due W to NW 3-14-4 Harrison (replacing brass plug in steel box)
7.	101.09'	Cut 'x' E-end median
8.	99.27'	Cut 'x' S-bolt signal base
9.	93.68'	Cut 'x' S-end median